


ELEVATION

1" = 20'

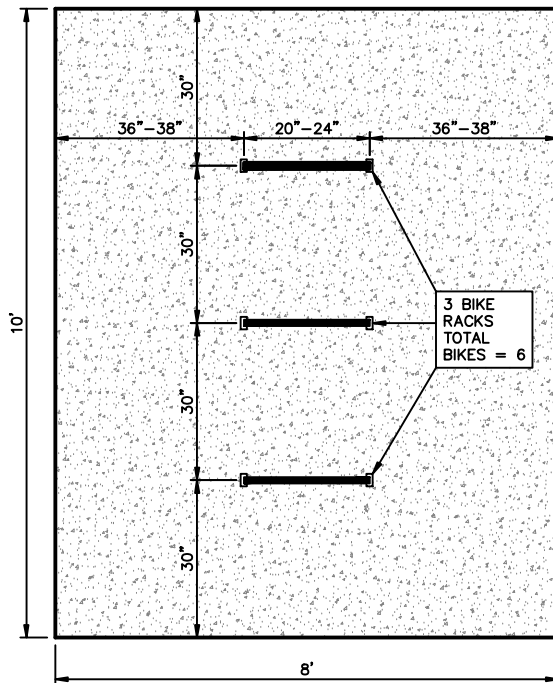

PLAN VIEW

1" = 20'

GUIDE SPECIFICATIONS FOR THE HOOP or INVERTED "U" BIKE RACK

- 1.1 Summary
 - A. Bikes parked per bike rack unit = 2.
 - B. Style shall be Hoop or sometimes referred as Inverted "U".
- 2.1 Acceptable Manufacturers
 - A. American Bicycle Security Company
 - B. Dero Bike Racks
- 2.2 Materials
 - A. As per Manufacturer's Specifications.
- 2.3 Finishes
 - A. Hot Dipped Galvanized or Powder Coated Color by Manufacturer.
- 2.4 Dimensions
 - A. Height - Minimum 34".
 - B. Width - Minimum 20"-24".
 - C. Spacing between Hoops = 30".
 - D. See Concrete Pad Detail for Hoop placement.
- 3.1 Installation
 - A. Installation and Anchoring shall be per Manufacturer's Specifications.

GENERAL NOTES:

1. BIKE RACK MANUFACTURER MAY BE SUBSTITUTED WITH APPROVAL OF ENGINEER OF RECORD BUT HOOP OR INVERTED "U" STYLE MUST BE USED.
2. BIKE RACK SHALL BE CONSISTENT WITH THE DESIGN OF THE PRINCIPLE STRUCTURES ON SITE AND PRINCIPLES FOUND IN THE "BICYCLE FACILITIES PLANNING AND DESIGN HANDBOOK" (STATE OF FLORIDA, DEPARTMENT OF TRANSPORTATION, 1997).

BIKE RACK AND CONCRETE PAD DETAILS